



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :

H04Q 7/38

A1

(11) International Publication Number:

WO 99/27734

(43) International Publication Date:

3 June 1999 (03.06.99)

(21) International Application Number: PCT/SE98/01965

(22) International Filing Date: 30 October 1998 (30.10.98)

(30) Priority Data:

08/975,632

21 November 1997 (21.11.97)

US

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON  
(publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors: COULOMBE, Marc; 2625 Saint Jacques West #302, Montreal, Quebec H3J 1H8 (CA). BUGNON, Jacques; 12 Plateau Belmont, Repentigny, Quebec J6A 3N9 (CA). COULOMBE, Benoit; 1531 Place Victor Hugo, Montreal, Quebec H3P 4C2 (CA). GLITHO, Roch; 4530 Beaconsfield, Montreal, Quebec H4A 2H7 (CA). SUGIRTHARAJ, David; 1181 Maria, Chomedey, Laval, Quebec H7W 1J8 (CA).


(74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: MIGRATION OF SUBSCRIBER DATA BETWEEN HOME LOCATION REGISTERS OF A TELECOMMUNICATIONS SYSTEM

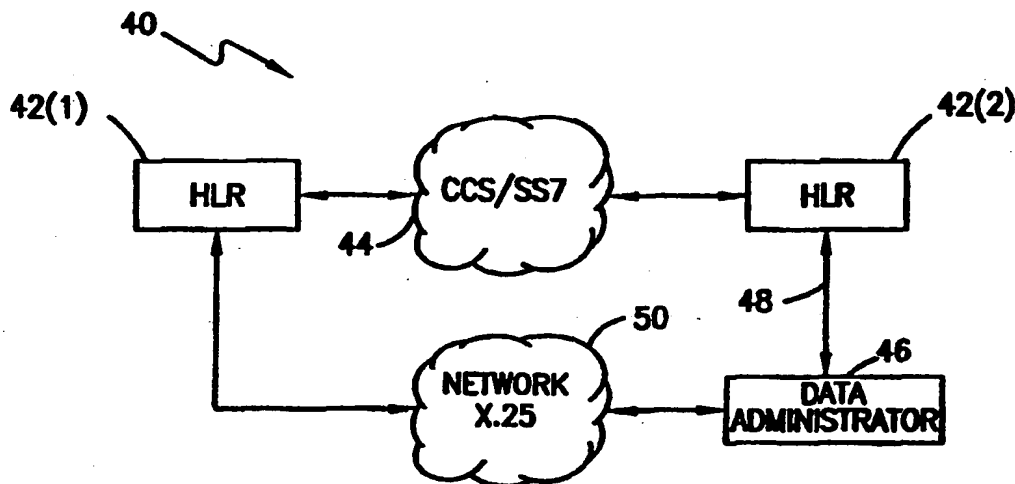

## (57) Abstract

A common channel signaling system (44) interconnects two home location registers (42). A data administrator (46) responds to a network operator request by sending commands to a first (originating) home location register to have subscriber data extracted (70) and formatted (72) for communication (74) over the common channel signaling system. Prior to communication, the first home location register verifies a common channel signaling system functionality level of a second (destination) home location register. If verified, the communication is sent, unformatted, and the included subscriber data stored. A data network and service management access layer (94) further interconnects the two home locations registers. The data administrator responds to a generic network operator migration request by generating (116) home location register specific commands instructing the first home location register to extract subscriber data for transfer over the data network and through (118) the service management access layer to the second home location register for storage (122). Transfer considerations are also evaluated to select either the common channel signaling system or data network (150) for the migration.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**MIGRATION OF SUBSCRIBER DATA BETWEEN  
HOME LOCATION REGISTERS  
OF A TELECOMMUNICATIONS SYSTEM**

5

**BACKGROUND OF THE INVENTION**

Technical Field of the Invention

The present invention relates to telecommunications systems and, in particular, to the migration of subscriber data between home location registers (HLRs) of a telecommunications system.

10

Description of Related Art

Reference is now made to FIGURE 1 wherein there is shown a block diagram of a portion of a telecommunications network 10 implementing a prior art subscriber data migration scheme. The network 10 comprises a public land mobile network (PLMN) 12 (also referred to as mobile communications network or cellular communications network) interconnected 14 with a public switched telephone network (PSTN) 16. Operation of the network 10, and in particular its constituent networks 12 and 16, to provide telecommunications services to subscribers (not shown) is well known to those skilled in the art, and will not be described herein.

15

The public land mobile network 12 includes plural home location registers 18 which individually operate as a database for storing subscriber data. This subscriber data includes permanently maintained subscriber profile information such as: the subscriber number (SNB), the mobile subscriber number (MSNB), the electronic serial number (ESN) of the subscriber's mobile telephone, subscription service features (like call waiting, call transfer) and associated data, and authentication data. The subscriber data further includes temporarily maintained information like current subscriber location.

20

25

Instances arise where it becomes necessary to migrate subscriber data among and between two home location registers 18. For example, redundant back-up of subscriber data to another home location register may be implemented, a new replacement/additional home location register may be installed in the network, or load balancing may need to be implemented between existing home location registers. The prior art migration scheme is illustrated in FIGURE 1 occurring between two home location registers 18 within the public land mobile network 12. In accordance with this prior art migration scheme, the subscriber data 20 at issue is first manually output 22 from a first home location register 18(1). This output may, for example, be made

30

35

to hard copy. The output subscriber data 20 is then manually input 24 into the second home location register 18(2). Typically, the manual input is made from the output hard copy. This prior art scheme involves the expenditure of a tremendous amount of effort, and is further prone to error. Additionally, the migration scheme takes a long time to complete, and before completed the subscriber data at issue may become obsolete.

There is a need for a more accurate and efficient, and perhaps automated, scheme for migration of subscriber data among and between two home location registers.

## 10 SUMMARY OF THE INVENTION

In a first embodiment of the present invention, subscriber data migration among and between two home location registers (HLRs) is performed/executed by way of a transfer over a common channel signaling system interconnecting those two home location registers. A data administrator connected to the home location registers at issue sends commands to extract the subscriber data from the database of a first (originating) home location register and format the subscriber data for communication over the common channel signaling system to a second (destination) home location register. Before proceeding with the extraction and formatting, the first home location register contacts the second home location register to verify its common channel signaling functionality level. If verified, extraction and formatting is completed, and the subscriber data is communicated over the common channel signaling system where the second home location register receives and unformats the subscriber data for storage in its database. If not verified, the process for transferring the subscriber data over the common channel signaling system is aborted.

In a second embodiment of the present invention, subscriber data migration among and between two home location registers is performed/executed by way of a transfer over a data network and through a service management access layer. A data administrator connected to the service management access layer sends a generic command requesting the subscriber data migration. The service management access layer interprets the generic command to generate home location register specific commands instructing a first (originating) home location register to extract subscriber data from its database for transfer (i.e., fetching) to the service management access layer. The service management access layer further interprets the generic command to identify delivery of the extracted subscriber data to a second (destination) home location register database. Lastly, home location register specific commands are

generated by the service management access layer instructing the downloading of the subscriber data to the second home location register for storage.

5 In a third embodiment of the present invention, the first and second embodiments are implemented in a complementary fashion. The data administrator responds to a network operator request for the migration of subscriber data between two home location registers by evaluating transfer considerations to select subscriber data migration by way of either the common channel signaling system or the data network. Furthermore, in instances where selection is made of the common channel signaling system for the transfer, but the connection cannot be verified, the data  
10 network option is then selected.

#### BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and apparatus of the present invention may be acquired by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings wherein:

15 FIGURE 1, previously described, is a block diagram of a portion of a telecommunications network implementing a prior art subscriber data migration scheme;

FIGURE 2 is a block diagram of a portion of a telecommunications network implementing a first embodiment of a present invention subscriber data migration  
20 scheme;

FIGURE 3 is a signal flow and nodal operation diagram illustrating operation of the first embodiment subscriber data migration scheme in connection with the network of FIGURE 2;

FIGURE 4 is a block diagram of a portion of a telecommunications network implementing a second embodiment of a present invention subscriber data migration  
25 scheme;

FIGURE 5 is a signal flow and nodal operation diagram illustrating operation of the second embodiment subscriber data migration scheme in connection with the network of FIGURE 4; and

30 FIGURE 6 is a block diagram of a portion of a telecommunications network implementing in a complementary fashion the first embodiment of FIGURE 2 subscriber data migration scheme with the second embodiment of FIGURE 4 subscriber data migration scheme.

## DETAILED DESCRIPTION OF THE DRAWINGS

Reference is now made to FIGURE 2 wherein there is shown a block diagram of a telecommunications network 40 implementing a first embodiment of a present invention subscriber data migration scheme. The network 40 includes, among other non-illustrated nodes, a plurality (two illustrated) of home location registers (HLRs) 42. The home location registers 42 store subscriber data. This subscriber data includes permanently maintained subscriber profile information such as: the subscriber number (SNB), the mobile subscriber number (MSNB), the electronic serial number (ESN) of the subscriber's mobile telephone, subscription service features (like call waiting, call transfer) and associated data, and authentication data. The subscriber data further includes temporarily maintained information like current subscriber location.

The home location registers 42 are interconnected by a common channel signaling (CCS) system 44, such as that commonly provided by the Signaling System No. 7 (SS7) network part of the telecommunications network 40. A data administrator 46 is connected to the home location registers 42. This connection may be made directly, as illustrated generally at 48. Preferably, the connection is instead made through a network connection, as illustrated generally at 50. This network 50 connection may be made through the use of a network, like an X.25 network, that is separate from the telecommunications network 40.

Reference is now made to FIGURE 3 wherein there is shown a signal flow and nodal operation diagram illustrating operation of the first embodiment subscriber data migration scheme in connection with the network of FIGURE 2. Using functionality provided by the data administrator 46, an operator of the network 40 may enter a generic command which is interpreted to specify for a given origin node (such as home location register 42(1)) which subscriber data (for example, profile(s)) are to be migrated (action 60), define where (i.e., to which destination node such as home location register 42(2)) the subscriber data are to be migrated (action 62). By "generic" it is meant a command that is independent of any one particular home location register 42. The data administrator 46 functions, at the very least, as a user interface with the network operator to receive operator commands with respect to the migration. The data administrator 46 then orders the data migration to occur by sending signal 64 to the origin home location register 42(1). Responsive to receipt of the data migration order signal 64, the receiving home location register 42(1) contacts the second home location register using signal 66 to verify its common channel signaling functionality level. If verified by a response signal 68, the home location register 42(1) extracts the subscriber data from its database (action 70) and formats the data (action 72) for communication over the common channel signaling system 44

(e.g., Signaling System No. 7 network, see FIGURE 2). The formatting operation implemented would include, as needed, operations for subscriber data segmenting, conversion, and addressing functions. The properly formatted subscriber data is then communicated 74 over the common channel signaling system 44 from the first home location register 42(1) towards the second home location register 42(2). This communication 74 transmission may be governed by appropriate, industry agreed to, Interim Standard IS-41 messaging, or through the use of vendor agreed to proprietary messaging, or through the use of vendor specific private extensions of IS-41 messaging. Furthermore, it is preferred that a standardized formatting for the subscriber data communication 74 be implemented to allow vendor independent transmissions. Otherwise, the formatting must be vendor agreed to or vendor specific. At the destination second home location register 42(2), the received formatted communication 74 is unformatted (action 76), and the included subscriber data is stored (action 78) in the database. In the event verification (signals 66 and 68) cannot be accomplished, the

Reference is now made to FIGURE 4 wherein there is shown a block diagram of a portion of a telecommunications network 90 implementing a second embodiment of a present invention subscriber data migration scheme. The network 90 includes, among other non-illustrated nodes, a plurality (two illustrated) of home location registers (HLRs) 92. The home location registers 92 store subscriber data. This subscriber data includes permanently maintained subscriber profile information such as: the subscriber number (SNB), the mobile subscriber number (MSNB), the electronic serial number (ESN) of the subscriber's mobile telephone, subscription service features (like call waiting, call transfer) and associated data, and authentication data. The subscriber data further includes temporarily maintained information like current subscriber location.

The home location registers 92 are connected to a service management access layer (SMAL) 94 (also referred to as a service order gateway). Also connected to the service management access layer 94 is a data administrator 96. The data administrator 96 functions, at the very least, as a user interface with the network operator for the entry of commands relating to data migration. Preferably, the connection among and between the home location registers 92, service management access layer 94, and data administrator 96 is made through a network connection, as illustrated generally at 98. This network 98 connection preferably comprises a network, like an X.25 network, that is separate from the telecommunications network 90. The service management access layer 94 includes data migration logic 100 which is responsive to commands received from the data administrator 96 for causing the extraction of subscriber data

stored in one node (such as the home location register 92(1)) for communication to and storage in another node (such as the home location register 92(2)).

Reference is now made to FIGURE 5 wherein there is shown a signal flow and nodal operation diagram illustrating operation of the second embodiment subscriber data migration scheme in connection with the network of FIGURE 4. Through the data administrator 96, a network operator enters (action 110) a generic command specifying the migration of stored subscriber data from one node (such as the home location register 92(1)) to another node (such as the home location register 92(2)). By "generic" it is meant a command that is independent of any one particular home location register 92. This command includes information specifying an identification of the subscriber data to be migrated, the types of subscriber data (e.g., permanent or temporary or both) to be migrated and a schedule for migration. A signal 112 indicative of the entered command is generated by the data administrator 96, and carried over the network 98 connection to the service management access layer 94. The data migration logic 100 of the service management access layer 94 responds to the received signal 112 by interpreting (action 114) the included generic command to develop a schedule for the migration, and further to generate (action 116) appropriate node specific commands 118 to be sent to the nodes (such as the home locations registers 92) at issue in accordance with the developed schedule. By "node specific" it is meant that the generated commands 118 may be vendor (or model) specific commands understood by certain home location registers 92. Such node specific commands are needed for those situations where the network utilizes home location registers supplied by different vendors or of different models. For example, appropriate commands 118 are generated to request (118(1)) the subscriber data to be extracted (120) from one node (such as the home location register 92(1)), route (118(2)) the extracted data through the service management access layer 94, and deliver (118(3)) the routed subscriber data to another node (such as the home location register 92(2)) for storage (action 120). More particularly, the generic format and protocol of the signal 112 may be translated to man-machine-language (MML) commands compatible with each of the home location registers 92 implicated in the data migration. Alternatively, a translation of the signal 112 may be made via a machine-machine-interface (MMI) (such as standard query language - SQL) which is unique to one or more of the identified home location registers 92. Other translations and conversions may be implemented in accordance with these teachings by persons of ordinary skill in the art. The operation of the service management access layer 94 essentially involves the fetching of subscriber data from one node (such as the home



location register 92(1)) and the downloading of that subscriber data to another node (such as the home location register 92(2)) for storage.

FIGURE 6 is a block diagram of a portion of a telecommunications network 140 implementing in a complementary fashion the first embodiment of FIGURE 2 subscriber data migration scheme with the second embodiment of FIGURE 4 subscriber data migration scheme. The network 140 includes, among other non-illustrated nodes, a plurality (two illustrated) of home location registers (HLRs) 142. The home location registers 142 store subscriber data. This subscriber data includes permanently maintained subscriber profile information such as: the subscriber number (SNB), the mobile subscriber number (MSNB), the electronic serial number (ESN) of the subscriber's mobile telephone, subscription service features (like call waiting, call transfer) and associated data, and authentication data. The subscriber data further includes temporarily maintained information like current subscriber location.

The home location registers 142 are interconnected by a common channel signaling (CCS) system 144, such as that commonly provided by the Signaling System No. 7 (SS7) network part of the telecommunications network 140. A data administrator 146 is connected to the home location registers 142. The data administrator 146 functions, at the very least, as a user interface with the network operator. The common channel signaling system 144 serves as a physical layer for transporting subscriber data stored in one node (such as the home location register 142(1)) for communication to and storage in another node (such as the home location register 142(2)) in response to commands issued by the data administrator 146. This transfer functionality is implemented in accordance with the signal flows and nodal operations illustrated in FIGURE 3 (described above). The home location registers 142 are also connected to a service management access layer (SMAL) interface 148. This connection among and between the home location registers 142, service management access layer 148, and data administrator 146 is preferably made through a network 150 connection such as that provided through the use of an X.25 network that is separate from the telecommunications network 140. The service management access layer 148 includes data migration logic 152 which is responsive to generic commands received from the data administrator 146 for generating node specific commands for the purpose of extracting subscriber data stored in one node (such as the home location register 142(1)) for communication to and storage in another node (such as the home location register 142(2)). This transfer functionality is implemented in accordance with the signal flows and nodal operations illustrated in FIGURE 5 (described above).

The transfer functionalities may be implemented in a complementary fashion in accordance with the signal flows and nodal operations illustrated in FIGURES 3 and 5 (described above). In instances where congestion concerns arise over the simultaneous use of the common channel signaling system 144 for conventional call control signaling as well as subscriber data migration, use may instead be made of the network 150, under the control of the data migration logic 152 of the service management access layer 148, to perform the migration between the home location registers 142. For example, in instances where the subscriber data of a large number of subscribers needs to be migrated (such as in connection with a wholesale back-up of a certain home location register), these communications may adversely affect operation of and throughput over the common channel signaling system 144. Use of the network 150 in this situation may comprise a better and more efficient choice. Furthermore, instances might arise wherein a verification of the common channel signaling system functionality level is not obtain. In this case, transfer using the common channel signaling system is aborted in favor of using the network 150. In other situations, it may be more efficient to utilize the common channel signaling system 144 to perform the migration between the home location registers 142. For example, in instances where minimal amount of subscriber data must be migrated, or in instances where loading on the common channel signaling system 144 is not an issue, these communications may just as easily be supported by the common channel signaling system. Accordingly, the data administrator 146 may further function to evaluate (action 154, see, FIGURES 3 and 5) which of the available transfer functionalities should be implemented taking into account such considerations as network loading, efficiency, size of file transfer, and the like.

Although preferred embodiments of the method and apparatus of the present invention have been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiments disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

## WHAT IS CLAIMED IS:

1. A data migration system for a telecommunications network, comprising:

a first database node for storing telecommunications related data;

5 a second database node for storing telecommunications related data;

a common channel signaling system link of the telecommunications network connecting the first and second database nodes; and

10 a data administrator generating a command issued to the first database node to extract certain telecommunications related data and format the extracted data for communication over the common channel signaling system link towards the second database node;

wherein the first home location register verifies with the second home location register prior to execution of the command a common channel signaling functionality level of the second home location register for supporting the data communication.

15 2. The system as in claim 1 wherein the common channel signaling system comprises a Signaling System No. 7 (SS7) network.

3. The system as in claim 1 wherein the first and second database nodes comprise home location registers (HLRs) within the telecommunications network.

20 4. A data migration system for a telecommunications network, comprising:

a first database node for storing telecommunications related data;

a second database node for storing telecommunications related data;

a data network connecting the first and second database nodes;

25 a data administrator generating a generic command to migrate certain telecommunications related data between the first and second database nodes; and

30 an interface connected to the data network, the interface responding to the data administrator issued generic command by generating a first database node specific command to fetch certain telecommunications related data over the data network from the first database node, and further generating a second database node specific command to download the fetched certain telecommunications related data over the data network for storage in the second database node.

5. The system as in claim 4 wherein the data network comprises an X.25 network.

6. The system as in claim 4 wherein the first and second database nodes comprise home location registers (HLRs) within the telecommunications network.

7. A data migration system for a telecommunications network, comprising:

- 5 a first database node for storing telecommunications related data;
- a second database node for storing telecommunications related data operating to verify a common channel signaling functionality level for the first database node;
- a data network connecting the first and second database nodes;
- a common channel signaling system link of the telecommunications network
- 10 connecting the first and second database nodes;
- a data administrator operating responsive to an operator request for migration of certain telecommunications related data between the first and second database nodes to:
  - evaluate transfer considerations and select either the data
  - 15 network or common channel signaling system to carry the migration;
  - operate responsive to selection of the common channel signaling system and verification of common channel signaling functionality level by generating a command issued to the second database node to extract certain telecommunications related data and format the extracted data for
  - 20 communication over the common channel signaling system link towards the first database node; and
  - operate responsive to the selection of the data network by generating a generic command to migrate certain telecommunications related data between the second and first database nodes; and
  - 25 an interface connected to the data network, the interface responding to the data administrator issued generic command by generating a second database node specific command to fetch certain telecommunications related data over the data network from the second database node, and further generating a first database node specific command to download the fetched certain telecommunications related data over the
  - 30 data network for storage in the first database node.

8. The system as in claim 7 wherein the data network comprises an X.25 network.

9. The system as in claim 7 wherein the common channel signaling system comprises a Signaling System No. 7 (SS7) network.

10. The system as in claim 7 wherein the first and second database nodes comprise home location registers (HLRs) within the telecommunications network.

11. A method for telecommunications related data migration comprising the steps of:

5 generating a first command issued to a first database node for the migration of certain telecommunications related data;

verifying with a second database node a common channel signaling system functionality level for supporting migration;

10 extracting of the certain telecommunications related data from the first database node;

formatting the extracted certain telecommunications related data for common channel signaling communication;

sending the formatted communication over a common channel signaling system to the second database node to execute the migration;

15 unformatting the formatted communication; and

storing of the certain telecommunications related data in the second database node.

12. The method as in claim 11 wherein the common channel signaling system comprises a Signaling System No. 7 (SS7) network.

20 13. The method as in claim 11 wherein the first and second database nodes comprise home location registers (HLRs) within a telecommunications network.

14. A method for telecommunications related data migration comprising the steps of:

25 generating a generic command for the migration of certain telecommunications related data;

responding to the generic command by generating a first database node specific command;

fetching the certain telecommunications related data from the first database node over a data network in response to the first database node specific command;


30 responding to the generic command by generating a second database node specific command; and

downloading of the certain telecommunications related data communicated over the data network for storage in the second database node in response to the second database node specific command.


5           15.     The method as in claim 14 wherein the data network comprises an X.25 network.

          16.     The method as in claim 14 wherein the first and second database nodes comprise home location registers (HLRs) within a telecommunications network.

1 / 3

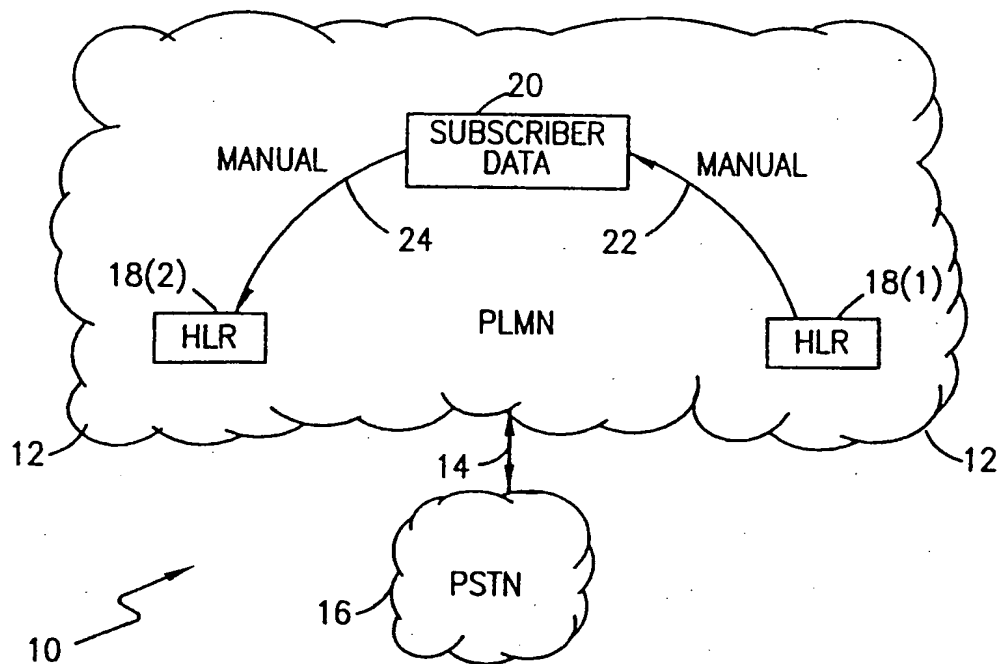

**FIG. 1**  
(PRIOR ART)

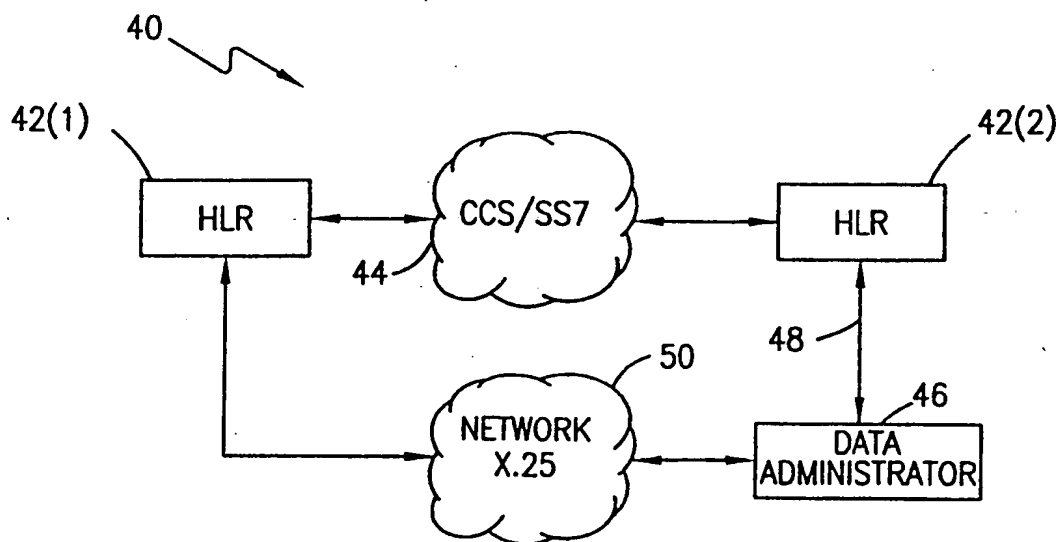

**FIG. 2**

2 / 3

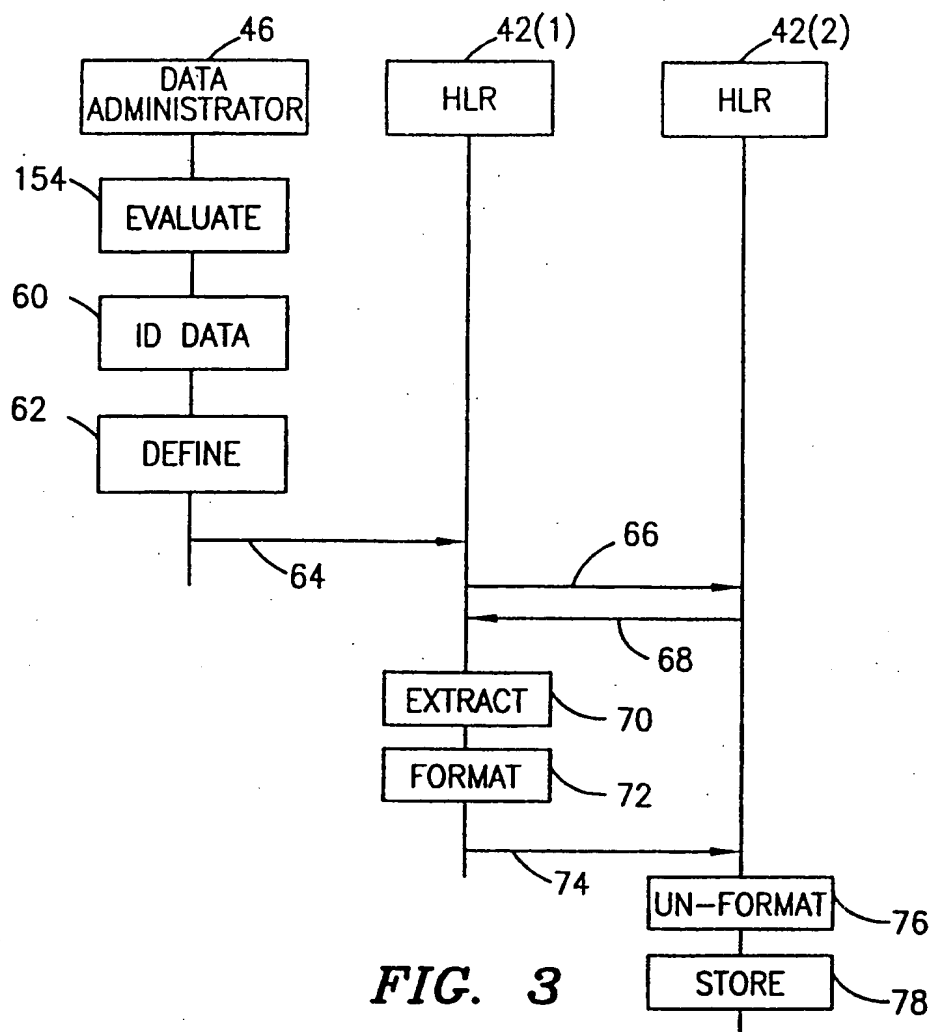


FIG. 3



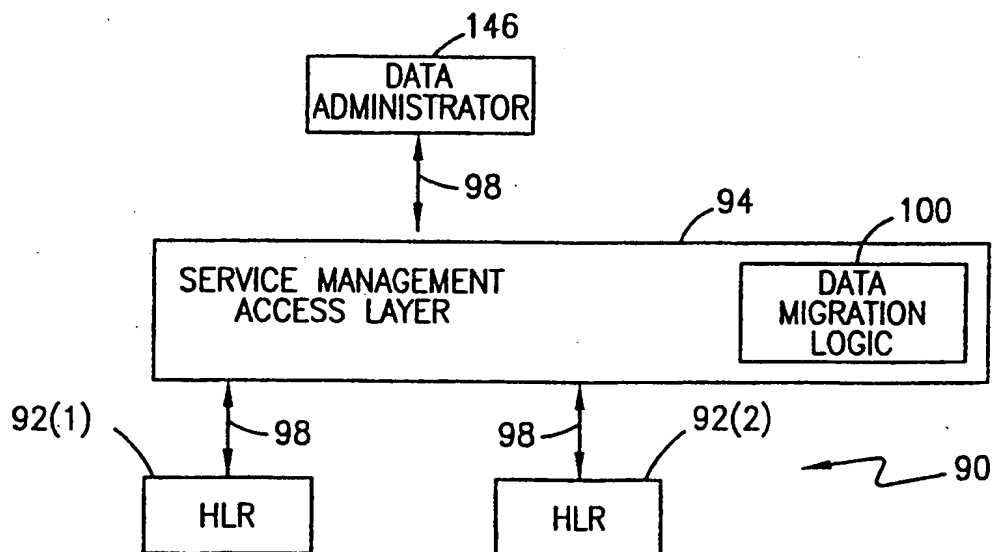


FIG. 4

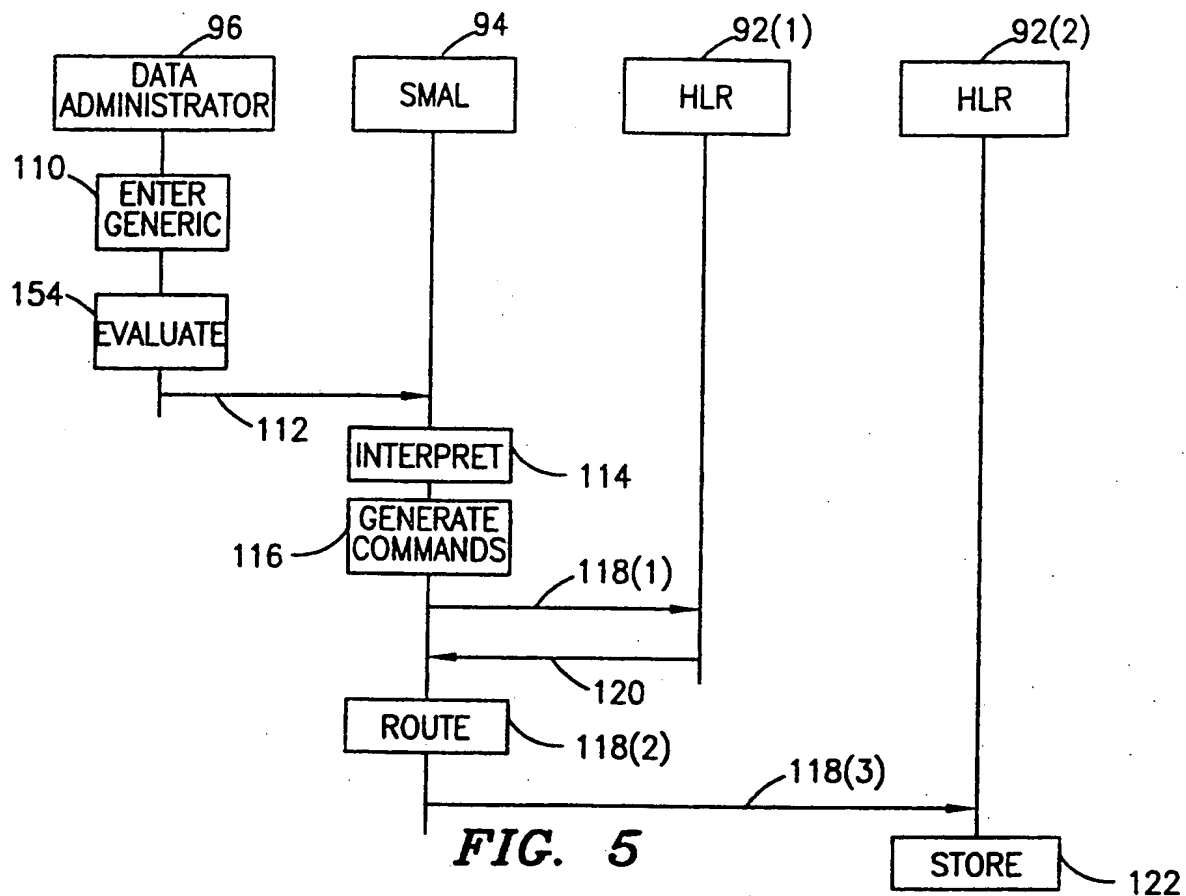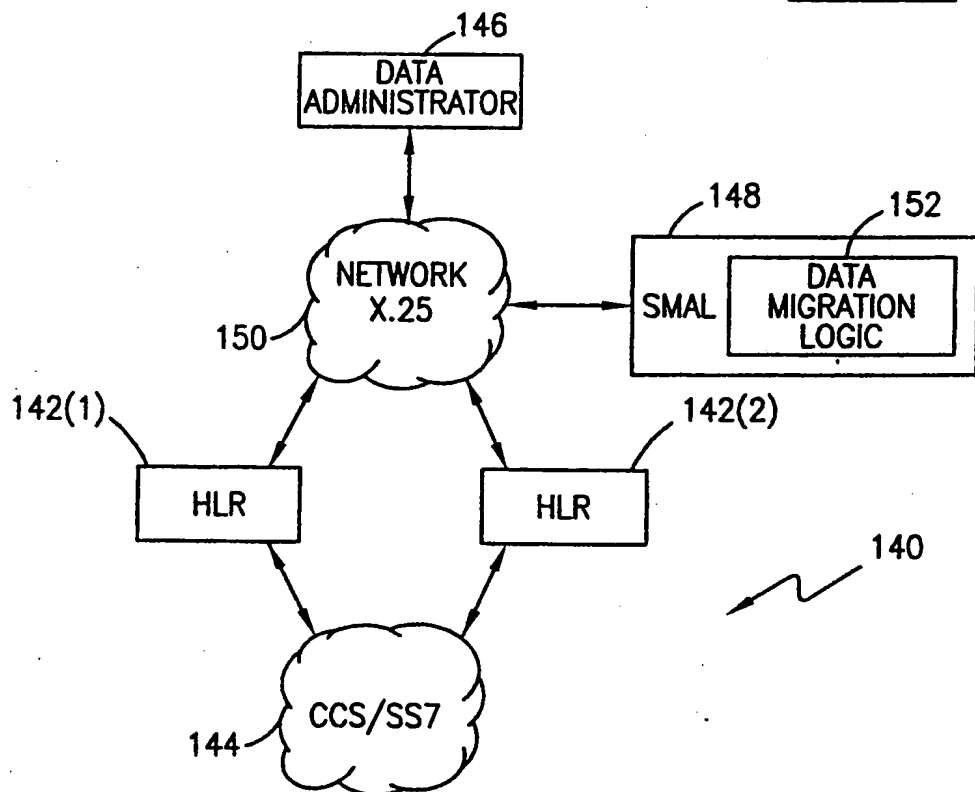

3 / 3

**FIG. 5****FIG. 6**

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/01965

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 664 005 A (SCHWARTZ LAURIE D ET AL) 2 September 1997  see column 10, line 18 - line 34 see column 12, line 63 - column 13, line 18 see column 16, line 66 - line 42 see column 26, line 6 - line 45 ---	1,2,4,5, 7-9,11, 12,14,15
A	WO 97 15162 A (ERICSSON TELEFON AB L M ;RUGAARD PEER (GB)) 24 April 1997  see abstract see page 13, line 17 - line 25 see page 20, line 15 - line 36 ---	1,3,4,6, 7,10,11, 13,14,16
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

10 February 1999

Date of mailing of the international search report

17/02/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Masche, C

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/01965

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 96 21981 A (ERICSSON TELEFON AB L M) 18 July 1996</p> <p>see abstract see page 7, line 25 - page 8, line 11 see page 12, line 32 - page 13, line 5 see page 16, line 28 - line 33</p> <p style="text-align: center;">---</p>	<p>1,3,4,6, 7,10,11, 13,14,16</p>
A	<p>EP 0 738 095 A (IBM) 16 October 1996</p> <p>see column 24, line 2 - line 53 see column 25, line 56 - column 26, line 6 see column 31, line 18 - line 31 see figure 5</p> <p style="text-align: center;">-----</p>	<p>1,4,7, 11,14</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 98/01965

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5664005	A	02-09-1997	US 5469496 A	21-11-1995
			US 5353331 A	04-10-1994
			US 5579379 A	26-11-1996
			US 5506887 A	09-04-1996
			US 5610972 A	11-03-1997
			US 5758281 A	26-05-1998
			WO 9318606 A	16-09-1995
WO 9715162	A	24-04-1997	SE 505444 C	25-08-1997
			AU 7353196 A	07-05-1997
			EP 0856234 A	05-08-1998
			SE 9503649 A	19-04-1997
WO 9621981	A	18-07-1996	US 5623532 A	22-04-1997
			AU 4460796 A	31-07-1996
			CA 2209900 A	18-07-1996
			EP 0804842 A	05-11-1997
			FI 972958 A	12-09-1997
			JP 10512122 T	17-11-1998
EP 0738095	A	16-10-1996	US 5659596 A	19-08-1997
			JP 8322081 A	03-12-1996

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.